


SAILOR



TECHNICAL MANUAL
FOR
COMPACT HF SSB N2165

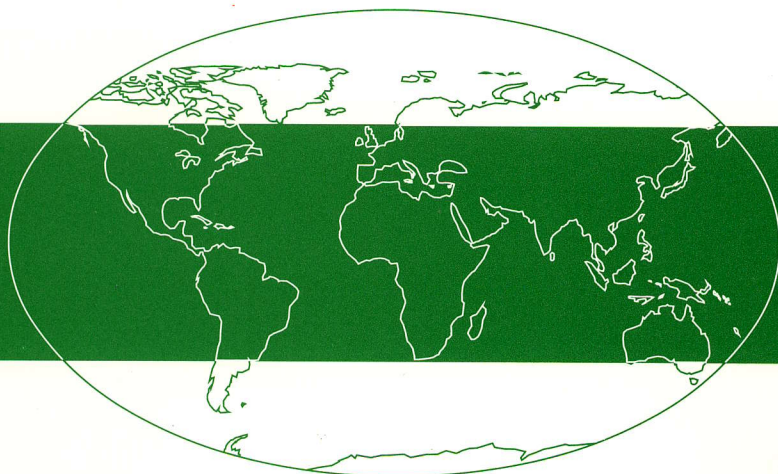

S.P. RADIO A/S · AALBORG · DENMARK

CONTENTS

| | | |
|----------|---|-----|
| 1 | INTRODUCTION | |
| 1.1 | GENERAL DESCRIPTION | 1-1 |
| 1.2 | TECHNICAL DATA | 1-1 |
| 1.3 | PRINCIPLE OF OPERATION AND BLOCK DIAGRAM | 1-2 |
| 2 | INSTALLATION | |
| 2.1 | MOUNTING POSSIBILITIES | 2-1 |
| 2.2 | DIMENSIONS AND DRILLING PLAN | 2-2 |
| 2.3 | ELECTRICAL CONNECTION AND ASSEMBLING | 2-3 |
| 3 | SERVICE | |
| 3.1 | MAINTENANCE | 3-1 |
| 3.2 | ALIGNMENT INSTRUCTIONS | 3-1 |
| 3.3 | PROPOSAL FOR NECESSARY MEASURING INSTRUMENTS | 3-2 |
| 3.4 | TROUBLE SHOOTING | 3-2 |
| 3.5 | PERFORMANCE CHECK | 3-3 |
| 3.6 | ADJUSTMENT PROCEDURE | 3-4 |
| 3.7 | NECESSARY ADJUSTMENT AFTER REPAIR | 3-4 |
| 4 | MECHANICAL DISASSEMBLING AND MODULE LOCATION | |
| 5 | CIRCUIT DESCRIPTION AND SCHEMATIC DIAGRAMS | |
| 5.1 | CONNECTION BOARD MODULE 1 (626451) | 5-1 |
| 5.2 | POWER SUPPLY MODULE 9 (626409) | 5-4 |
| 5.3 | INTERCONNECTION CABLE DIAGRAM | 5-8 |
| 6 | PARTS LIST | |

CONTENTS

| | | |
|----------|---|-----|
| 1 | INTRODUCTION | |
| 1.1 | GENERAL DESCRIPTION | 1-1 |
| 1.2 | TECHNICAL DATA | 1-1 |
| 1.3 | PRINCIPLE OF OPERATION AND BLOCK DIAGRAM | 1-2 |
| 2 | INSTALLATION | |
| 2.1 | MOUNTING POSSIBILITIES | 2-1 |
| 2.2 | DIMENSIONS AND DRILLING PLAN | 2-2 |
| 2.3 | ELECTRICAL CONNECTION AND ASSEMBLING | 2-3 |
| 3 | SERVICE | |
| 3.1 | MAINTENANCE | 3-1 |
| 3.2 | ALIGNMENT INSTRUCTIONS | 3-1 |
| 3.3 | PROPOSAL FOR NECESSARY MEASURING INSTRUMENTS | 3-2 |
| 3.4 | TROUBLE SHOOTING | 3-2 |
| 3.5 | PERFORMANCE CHECK | 3-3 |
| 3.6 | ADJUSTMENT PROCEDURE | 3-4 |
| 3.7 | NECESSARY ADJUSTMENT AFTER REPAIR | 3-4 |
| 4 | MECHANICAL DISASSEMBLING AND MODULE LOCATION | |
| 5 | CIRCUIT DESCRIPTION AND SCHEMATIC DIAGRAMS | |
| 5.1 | CONNECTION BOARD MODULE 1 (626451) | 5-1 |
| 5.2 | POWER SUPPLY MODULE 9 (626409) | 5-4 |
| 5.3 | INTERCONNECTION CABLE DIAGRAM | 5-8 |
| 6 | PARTS LIST | |

CONTENTS

| | | |
|----------|---|-----|
| 1 | INTRODUCTION | |
| 1.1 | GENERAL DESCRIPTION | 1-1 |
| 1.2 | TECHNICAL DATA | 1-1 |
| 1.3 | PRINCIPLE OF OPERATION AND BLOCK DIAGRAM | 1-2 |

1 INTRODUCTION

1.1 GENERAL DESCRIPTION

The power supply is constructed to supply RM2150 and RM2151, at the same time.

The power supply can be supplied from both AC and DC supply, as a no-break power supply.

1.2 TECHNICAL DATA

Input supply: 99 - 130V AC or 198 - 264V AC 50 Hz.
 20 - 32V DC

Power consumption:

| AC | AC | DC | |
|------|------|-------|-------------------------|
| 110V | 220V | 26.4V | |
| amps | amps | amps | |
| 0.26 | 0.13 | 1.1 | RM2150 |
| 0.26 | 0.13 | 1.1 | RM2151 |
| 0.52 | 0.26 | 2.2 | RM2150 and RM2151 |


Output voltage: 8.9V \pm .6V Max. current 1.7A
 19V \pm .6V Max. current 1.0A
 19V \pm .6V Max. current 0.5A

Operating temperature: -15°C to +55°C.


1.3 PRINCIPLE OF OPERATION AND BLOCK DIAGRAM

POWER SUPPLY MODULE 9

The power supply is designed to supply the RM2150 and RM2151. The N2165 can be supplied from 220V AC as well as 24V DC supply. The power supply module 9 is supplied with 28V AC from the main transformer, or with 24V DC from the battery. The input from the main transformer is rectified and then combined with the 24V DC. From the rectifier, the voltage is fed to the input filter, which filters the noise from the switch mode power supply. After the input filter the on/off relay is located, after which the switch control and push-pull switch transistors are located. The switch control has two external regulation loops, one for current and one for voltage regulation. The power supply has three output voltages : 19V and 9.5V.

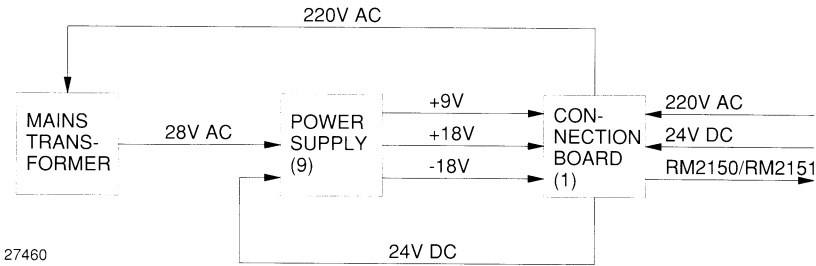

27460

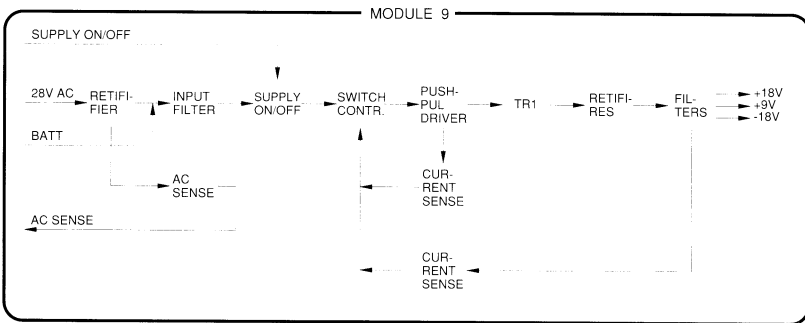


27461

CONTENTS


| | | |
|----------|---|-----|
| 2 | INSTALLATION | |
| 2.1 | MOUNTING POSSIBILITIES | 2-1 |
| 2.2 | DIMENSIONS AND DRILLING PLAN | 2-2 |
| 2.3 | ELECTRICAL CONNECTION AND ASSEMBLING | 2-3 |

2 INSTALLATION

2.1 MOUNTING POSSIBILITIES

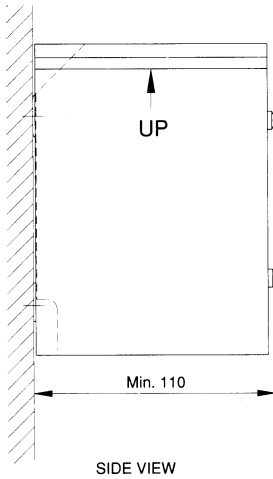


27462

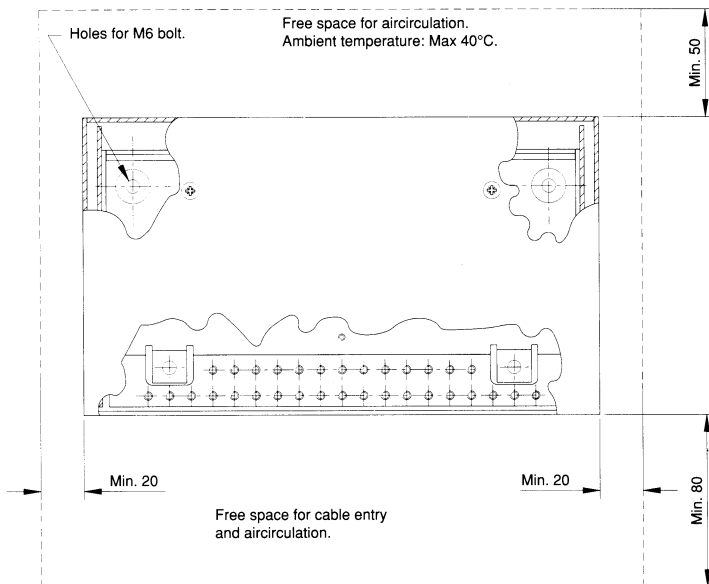


27463


2.2 DIMENSIONS AND DRILLING PLAN

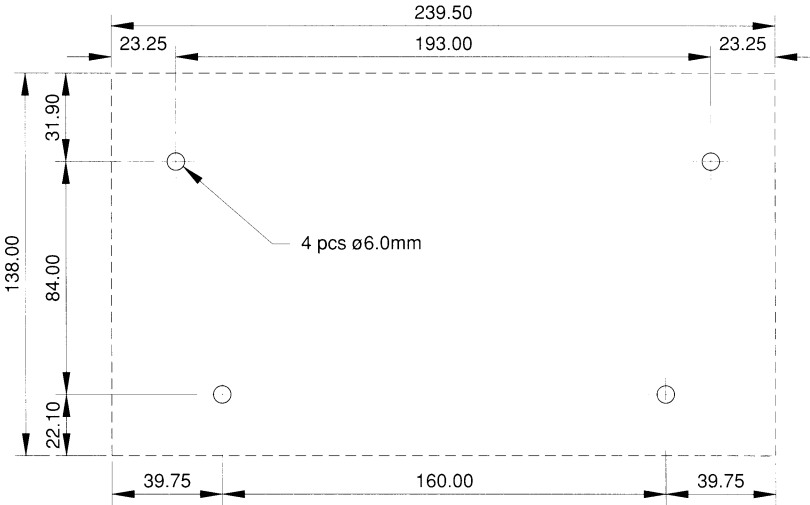


27468

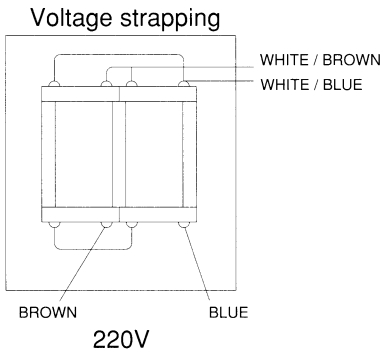

27464

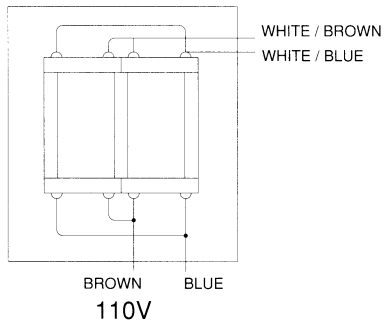

2.3 ELECTRICAL CONNECTION AND ASSEMBLING

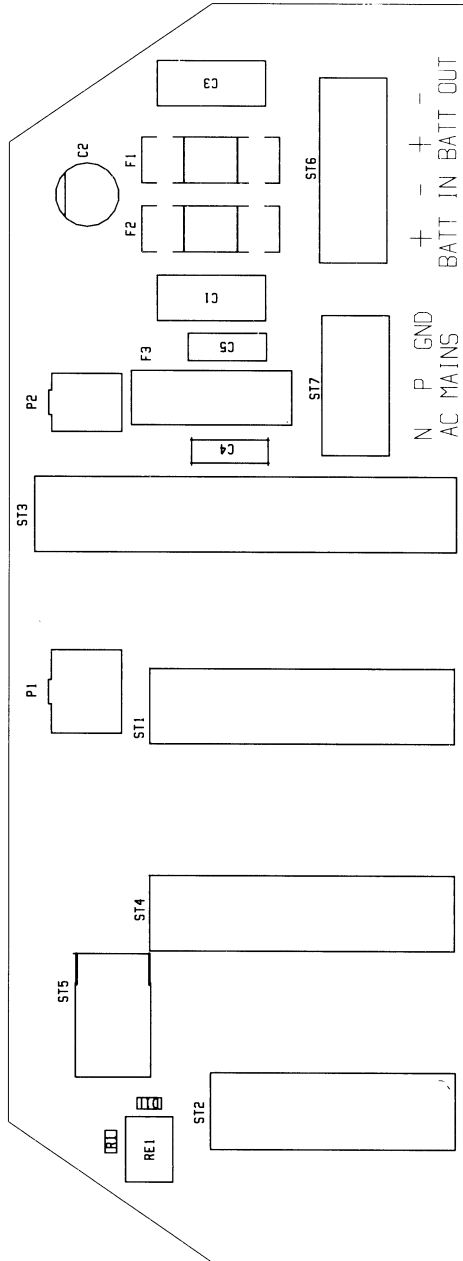

| N2165 | RM2150 RM2151 | | |
|-------|------------------|--------------|------------------|
| ST1 | P2-5 | COLOUR | SIGNAL |
| 1 | 16 | BROWN/GREY | HT-ON |
| 2 | 6 | YELLOW | SP-BUS INTERRUPT |
| 3 | 15 | BROWN/GREEN | TX-KEY |
| 4 | 18 | WHITE/YELLOW | AF TO TX |
| 5 | 9 | BLUE | AF TO TX COMMON |
| 6 | 17 | WHITE/PINK | |
| 7 | 21 | WHITE/GREEN | |
| 8 | 24 | GREY/PINK | EXT LOUDSP. |
| 9 | 14 | BROWN/YELLOW | RX-MUTE |
| 10 | | | SPARE |

| N2165 | RM2150 RM2151 | | |
|-------|------------------|------------|---------------|
| ST3 | P2-5 | COLOUR | SIGNAL |
| 1 | 13 | BROWN/PINK | SUPPLY ON/OFF |
| 2 | 25 | RED/BLUE | -BATT |
| 3 | 12 | WHITE | +18V |
| 4 | 10 | VIOLET | -18V |
| 5 | 11 | GREY | +9V |
| 6 | 22 | WHITE/BLUE | GROUND |
| 7 | 4 | PINK | EXT. ALARM |
| 8 | 2 | BROWN | ALARM IN |
| 9 | 7 | GREEN | ALARM OUT |
| 10 | | | SPARE |
| 11 | | | SPARE |
| 12 | 1 | BLACK | EXT. MUTE |
| 13 | 3 | RED | TX-READY |
| 14 | 23 | WHITE/GREY | COMMON |

Cable between N2165 and SAILOR HF SSB Transmitters
Cable specification:

T2130: 3 x 0.18 mm² max. 30 metres

T2131/35: 3 x 0.18 mm² max. 30 metres

T1130/H1233: 9 x 0.18 mm² max. 10 metres

T1135/H1275: 9 x 0.18 mm² max. 10 metres


| N2165 | T2130 | T2131/ T2135 | H1233/ H1275 | SIGNAL |
|-------|----------------|-----------------|-----------------|--------------------------|
| ST4 | ST3 & ST2 | ST7 | ST102 | |
| 1 | | | 2 | EXT.MUTE |
| 2 | | | 5 | TUNE READY |
| 3 | | | 12 | COMMON |
| 4 | | | 3 | HT ON |
| 5 | ST2-16 | 12 | | SP-BUS INTERRUPT |
| 6 | ST3-5 | 8 | 11 | TX-KEY |
| 7 | ST3-7 | 10 | 13 | AF TO TX |
| 8 | ST3-8 | 11 | 14 | AF TO TX COMMON |
| 9 | | | | |
| 10 | | | | |
| | ST3-6 ST2-4 | ST7-2 ST7-9 | | SEE NOTE 1 AND NOTE 2 |

NOTE 1


T2130 connection board

NOTE 2

T2131/T2135 connection board







27465



27466

T1130/T1135 connection board

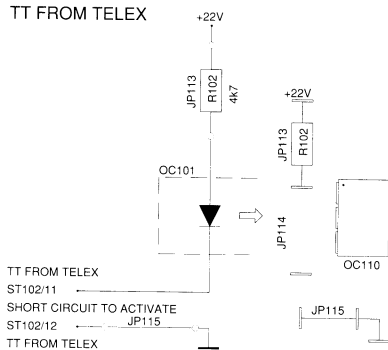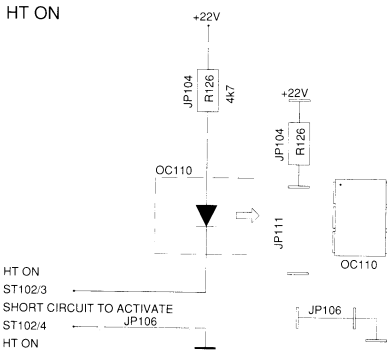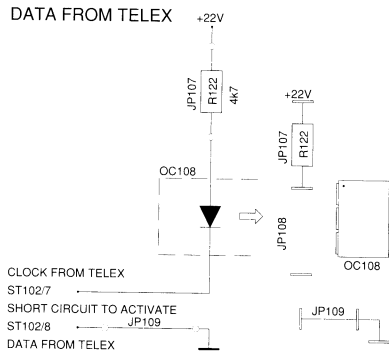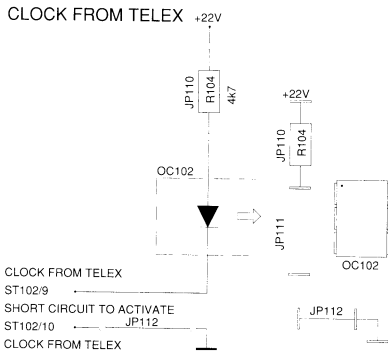

27467

CONTENTS

| | | |
|----------|---|------------|
| 3 | SERVICE | |
| 3.1 | MAINTENANCE | 3-1 |
| 3.2 | ALIGNMENT INSTRUCTIONS | 3-1 |
| 3.3 | PROPOSAL FOR NECESSARY MEASURING INSTRUMENTS | 3-2 3-2 |
| 3.4 | TROUBLE SHOOTING | 3-2 |
| 3.5 | PERFORMANCE CHECK | 3-3 |
| 3.6 | ADJUSTMENT PROCEDURE | 3-4 |
| 3.7 | NECESSARY ADJUSTMENT AFTER REPAIR | 3-4 |

3 SERVICE

3.1 MAINTENANCE

PREVENTIVE MAINTENANCE

If N2165 has been installed in a proper way the maintenance can be reduced to an overhaul at each visit of the service staff.

Then inspect the set, the antenna, cables, and plugs for mechanical damages, salt deposits, corrosion, and any foreign material.

Owing to its traditional structure, the N2165 has a long lifetime, but it must always be carefully checked at intervals not exceeding 12 months - dependent on the conditions under which the set is working. The set must be brought to the service workshop to be tested.

Along with each set a TEST-SHEET is delivered in which all the measurements, made in the test department of the factory, are listed. If the control measurings made in the service workshop should not show the same values as those listed in the test-sheet, the set must be adjusted as specified in chapter 3.6 ADJUSTMENT PROCEDURE.

3.2 ALIGNMENT INSTRUCTIONS

INTRODUCTION

The measuring values indicated in chapter 5 CIRCUIT DESCRIPTION AND SCHEMATIC DIAGRAMS are typical values and as indicated it will be necessary to use instruments in absolute conformity with the below list.

3.3 PROPOSAL FOR NECESSARY MEASURING INSTRUMENTS

Power Supply 20-50V, 10A

Oscilloscope type PM3216

PHILIPS

Electronic Multimeter type PM2505:

PHILIPS

Load +18V, 18 ohm/20W

-18V, 37 ohm/10W

+9V, 5.6 ohm/14W

3.4 TROUBLE SHOOTING

Trouble shooting should only be performed by persons with sufficient technical knowledge, who have carefully studied the operation principles and structure of the power supply N2165.

N2165 has a trimmer, which must not be touched, unless adjusted as specified in chapter 3.6 ADJUSTMENT PROCEDURE.

When measuring the unit, shortcircuits must be avoided as the transistors would be spoiled.

3.5 PERFORMANCE CHECK

The performance check has to be carried out with the dummy load, specified in chapter 3.3, connected to the output.

1. Connect the power supply to 220V (be sure that the power supply is set to 220V).
2. Turn the power supply on by connecting ST3 pin 1 to ST3 pin 2.
3. Check the voltage from pin 3 to pin 4 at P1 on the power supply (module 9). It has to be $30V \pm 2V$ AC.
4. Check the voltage at the connection board ST3.
With pin 6 as ground, measure the voltage (DC) at:
pin 3 $+18.7V \pm 0.5$
pin 4 $-19.3V \pm 0.3$
pin 5 $+8.4V \pm 0.4$
5. Check with an oscilloscope the curve forms at the drains of Q3, Q4 on module 9 (see the diagram).
6. Connect a variable power supply to the battery input terminals on module 1. Connect a voltmeter from ST3 pin 6 to pin 3 (18V) on module 1.
7. Check the overvoltage shot-down circuit by increasing the voltage from the variable power supply until the +18V drops. The input voltage from the variable power supply should now be $45V \pm 5V$.

3.6 ADJUSTMENT PROCEDURE

There is only one adjustment in the power supply, that is adjustment of the overvoltage shot-down.

1. Connect a variable power supply to the battery input terminals on module 1. Connect a voltmeter from ST3 pin 6 to pin 3 (18V) on module 1.
2. Adjust the variable power supply to 45V. Then adjust R11 on module 9, so that the power supply just shots down. (+18V drops).


3.7 NECESSARY ADJUSTMENT AFTER REPAIR

Adjustments are only necessary after change of U1, when the overvoltage shot-down circuit needs adjustment as described in chapter 3.6.


CONTENTS

- 4 MECHAICAL DISASSEMBLING AND
MODULE LOCATION**



4 MECHANICAL DISASSEMBLING AND MODULE LOCATION

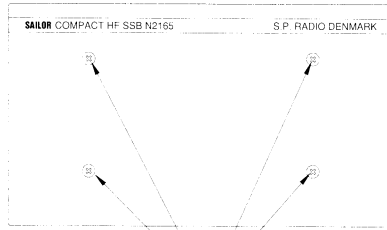

Remove to disassemble.



Loosen the 4 bolts with hexagon head.

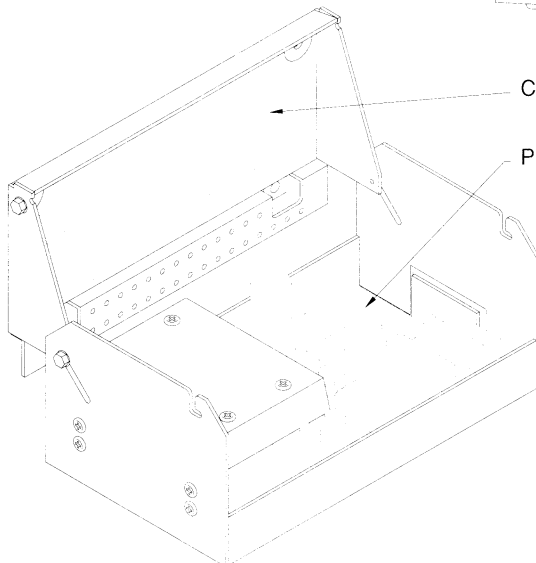

Connection board module 1

Power supply module 9

30330


CONTENTS

| | | |
|----------|---|-----|
| 5 | CIRCUIT DESCRIPTION AND SCHEMATIC DIAGRAMS | |
| 5.1 | CONNECTION BOARD MODULE 1 (626451) | 5-1 |
| 5.2 | POWER SUPPLY MODULE 9 (626409) | 5-4 |
| 5.3 | INTERCONNECTION CABLE DIAGRAM | 5-8 |

5 CIRCUIT DESCRIPTION AND SCHEMATIC DIAGRAMS

5.1 CONNECTION BOARD MODULE 1 (626451)

Connection Board (1)

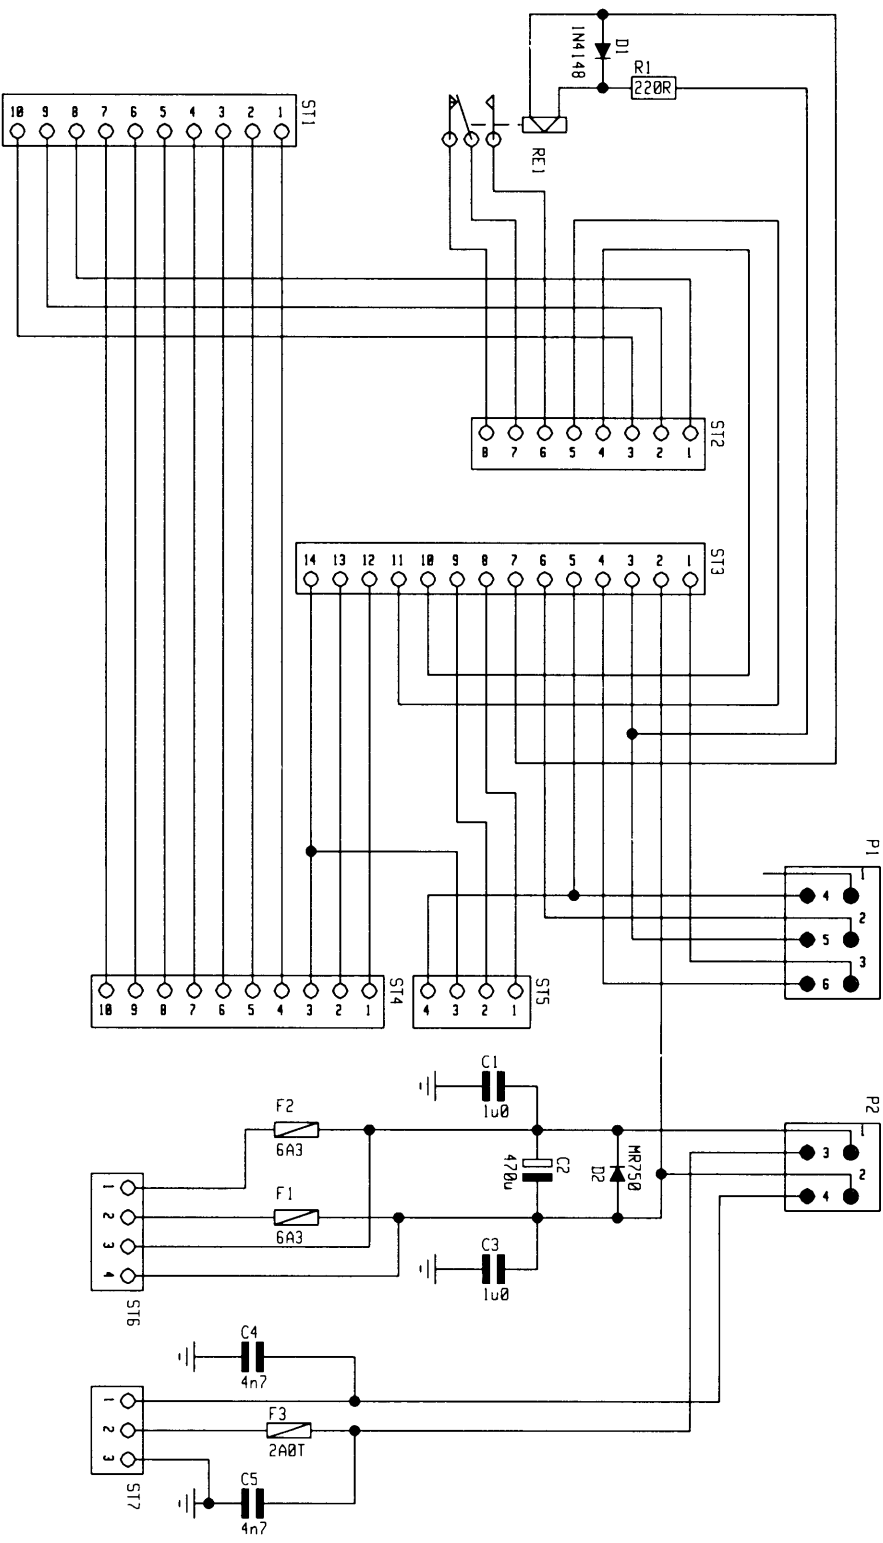

TO RM2150/51

TO EXT. ALARM

TO RM2150/51

TO TRANSMITTER

TO C2149

P1 TO POWER SUPPLY

ST1
 PIN 1 HT ON
 PIN 2 SP-BUS INTERRUPT
 PIN 3 TX KEY
 PIN 4 AF TO TX
 PIN 5 AF TO TX COMMEN
 PIN 6 DATA 1000B
 PIN 7 CLOCK 1000B
 PIN 8 SPARE
 PIN 9 SPARE
 PIN 10 SPARE

PIN 1 SPARE
 PIN 2 SPARE
 PIN 3 SPARE
 PIN 4 LINE IN
 PIN 5 LINE IN
 PIN 6 ETX.-ALARM NO
 PIN 7 ETX.-ALARM C
 PIN 8 ETX.-ALARM NC

PIN 1 SUPPLY ON/OFF
 PIN 2 -BATT
 PIN 3 +18V
 PIN 4 -18V
 PIN 5 +9V
 PIN 6 GROUND
 PIN 7 EXT.-ALARM
 PIN 8 ALARM IN
 PIN 9 ALARM OUT
 PIN 10 LINE IN
 PIN 11 LINE IN
 PIN 12 EXT MUTE
 PIN 13 TX-READY
 PIN 14 COMMEN

PIN 1 EXT MUTE
 PIN 2 TX-READY
 PIN 3 COMMEN
 PIN 4 HT ON
 PIN 5 SP-BUS INTERRUPT
 PIN 6 TX KEY
 PIN 7 AF TO TX
 PIN 8 AF TO TX COMMEN
 PIN 9 DATA 1000B
 PIN 10 CLOCK 1000B

ST5
 PIN 1 ALARM IN
 PIN 2 ALARM OUT
 PIN 3 COMMEN
 PIN 4 9V

PIN 1 AC SENSE
 PIN 2 GND
 PIN 3 SUPPLY ON/OFF
 PIN 4 +9V
 PIN 5 +18V
 PIN 6 -18V

ST6 TO BATTERY

PIN 1 +BATT IN
 PIN 2 -BATT IN
 PIN 3 +BATT OUT
 PIN 4 -BATT OUT

ST7 TO 110/220V AC

PIN 1 N-AC
 PIN 2 P-AC
 PIN 3 GND

P2 TO POWER SUPPLY

PIN 1 +BATT
 PIN 2 -BATT
 PIN 3 P-220V AC
 PIN 4 N-220V AC

4-0-26451E

5.2 POWER SUPPLY MODULE 9 (626409)

The power supply is an isolated forward switch mode converter. It converts a 24V -19% +30% DCV voltage to $\pm 19V$ and 9V.

Most of the necessary amplifiers, flip-flops etc. are contained in the ICU1. The only exception from this, is the secondary voltage sense D18. C2, C26, C27, L1, C3, C4 and C12, C13 are the input filter. The 12V DC supply voltage for U1 is supplied to R2, D7, C8, Q4 and C9 during starting-up. When the converter is in function it is supplied by L2 and D8, D9. This voltage is approx. 15 Volt and forces Q1 to turn off. This configuration reduces the power loss in Q1. R5 and C7 determine the oscillator frequency to approx. 50 kHz.

The +18V DC output voltage is sensed by D18 via the voltage divider R27 and R28. D18 is an integrated shunt regulator. If the voltage on the sense input (R27/R28 common point) is higher than 2.5V, then the D18 starts conducting. In this case, current starts running in the optocoupler diode OC2.

R26 is a DC feed-back and R25/C19 is an AC feed-back.

R24 limits the current in the optocoupler diode.

When current runs in the optocoupler diode, the optocoupler transistor (OC2) starts conducting nearly the same current. This current results in a voltage across R6. This voltage is connected to the non inverting input of the internal error amplifier of U1. The internal error amplifier is fixed to a gain of 2 by R7 and R8.

The output MOS transistor current is sensed by R17 and R18. The current signal is then led to the current sense amplifier input, pin 4. The R15 and C11 is a lowpass filter to remove noise. The emitter of Q2 follows the ramp voltage on the oscillator capacitor C7. R12 adds some of this ramp signal to the current signal. This is necessary to avoid sub-harmonic oscillations when the duty cycle is higher than 50%.

The voltage on pin 1 determines the clamp voltage for the error voltage and thus also the max. current in the output MOS transistors. This voltage is determined by R3 and R4. The capacitor C6 is the soft start capacitor, making the duty cycle and the output voltage rise slowly.

The two pulse width modulated outputs are led to the two output MOS transistors by R13 and R14. These two resistors slow down the rising time of the MOS transistors to prevent spurious oscillations.

R16 and R20 ensure that the transistors always stay off when the IC U1 is off.


R19, C15 and R21, C16 and R22, C17 and R23, C18 are snappers reducing oscillation due to stray capacitors and stray inductions in the transformer TR1.

D12 to D17 and L3 to L5 and C20 to C25 are the three output rectifiers and filters.


The input voltage is sensed by a 0.35 Volt shut down terminal pin 16 of U1 via R9, R10 and R11.

If the supply voltage is higher than approx. 45V DC, the converter stops.5.2.

COMPONENT LOCATION POWER SUPPLY MODULE 9

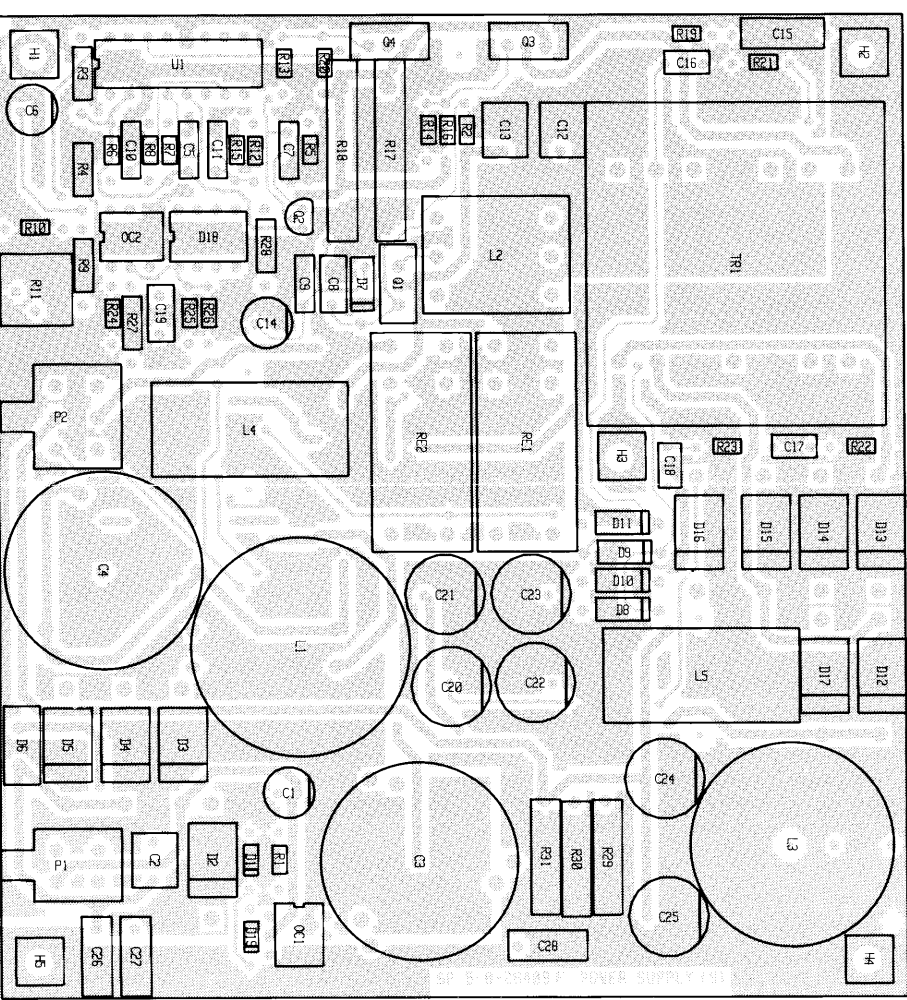


View from component side with upper side tracks.

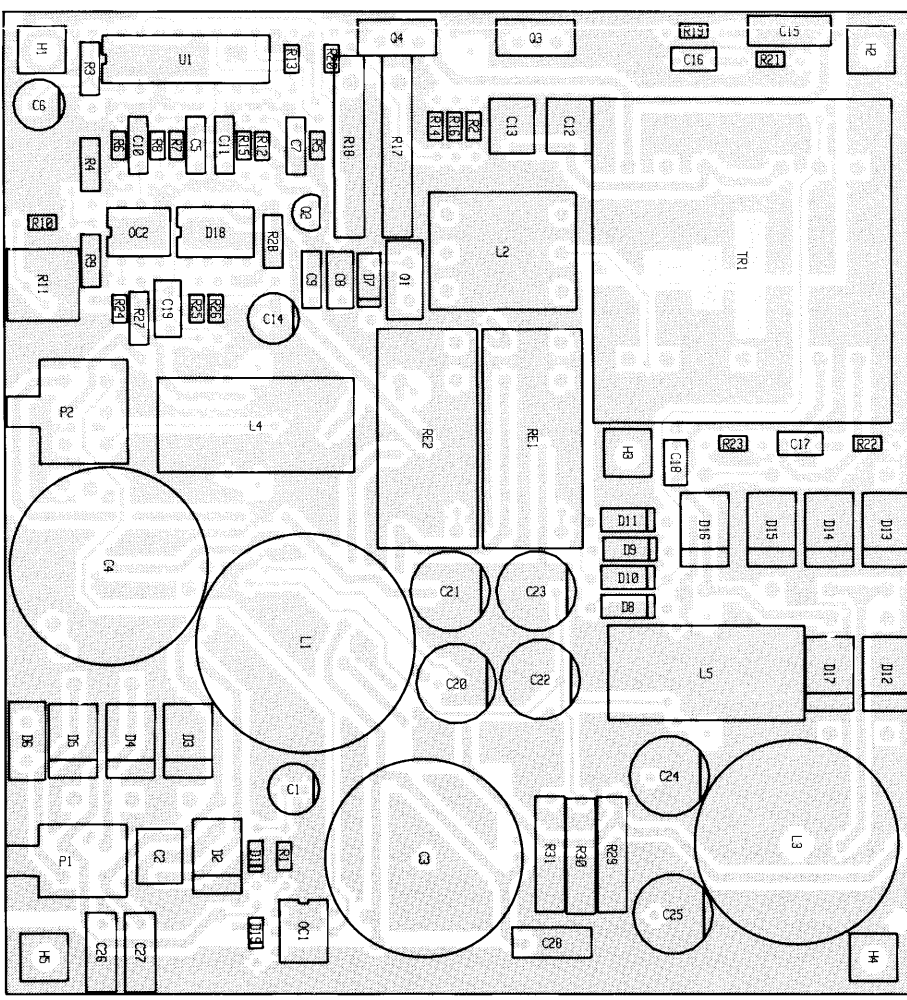


View from component side with lower side tracks.

POWER SUPPLY MODULE 9

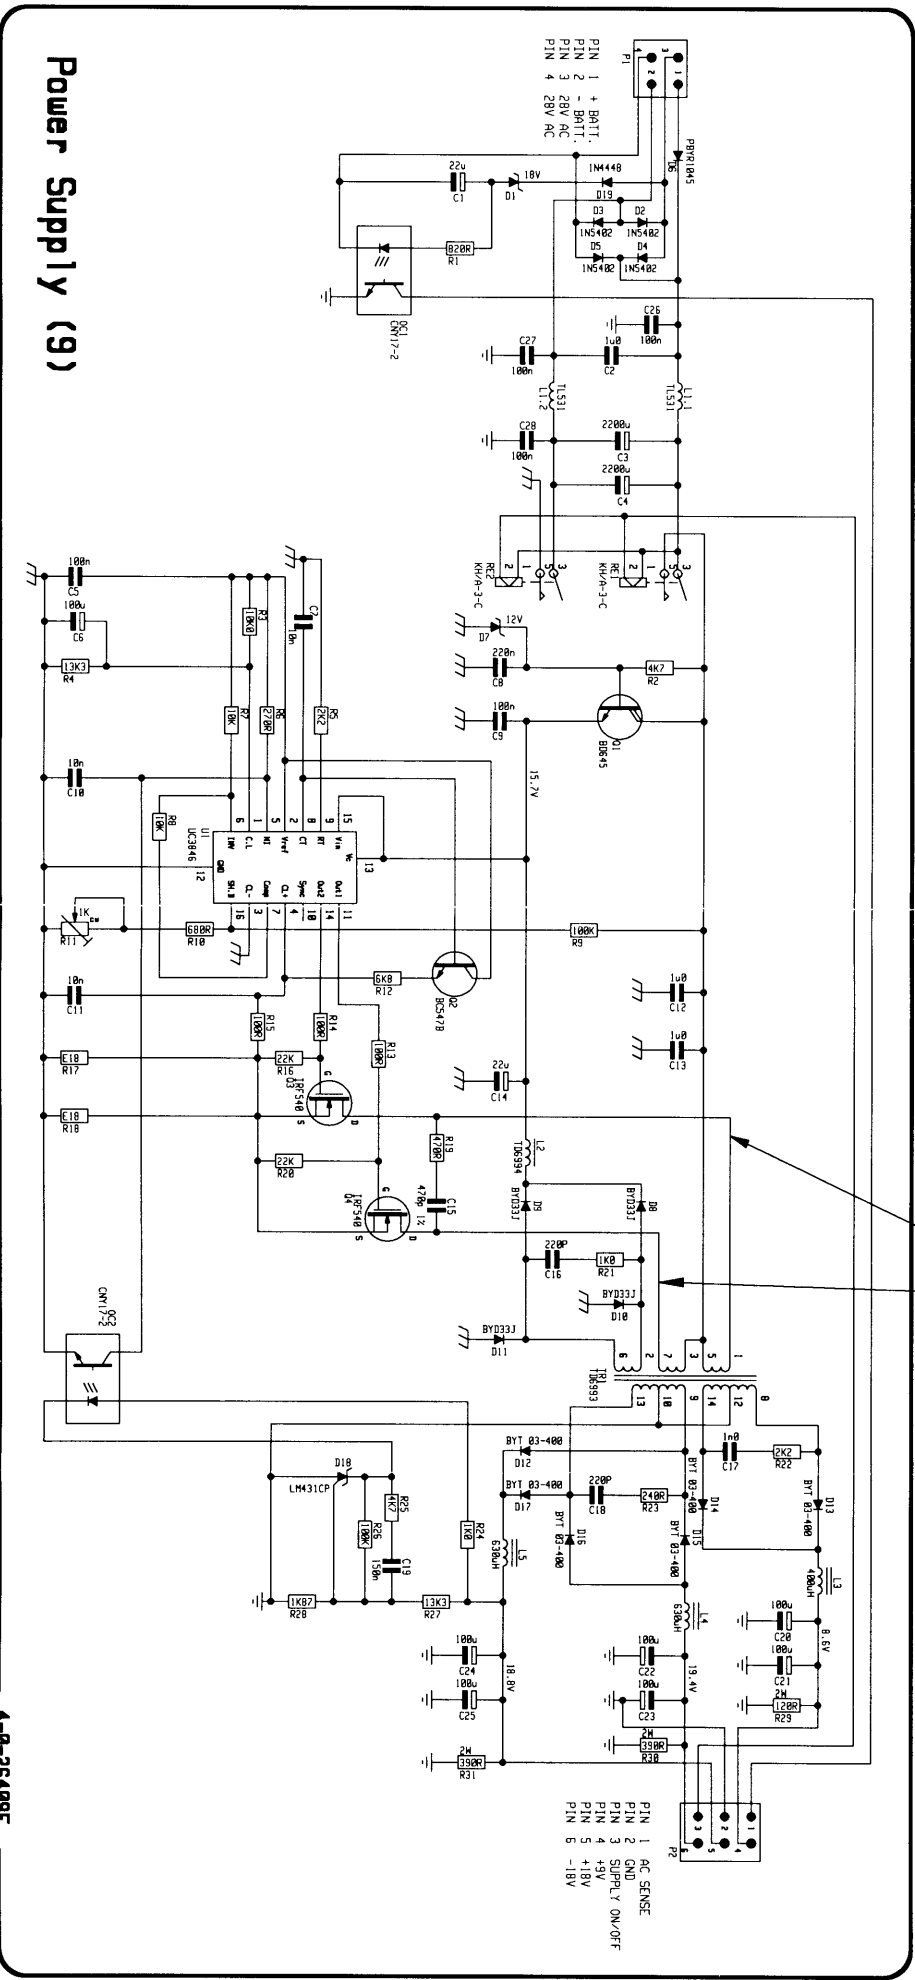

5.3 INTERCONNECTION CABLE DIAGRAM

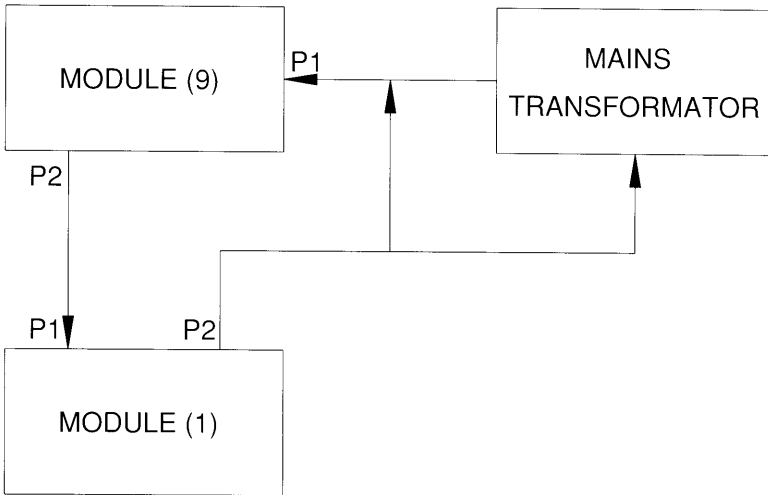

CONNECTION BOARD (1)

POWER SUPPLY (9)

| P1 | | P2 |
|----|---------------|----|
| 1 | AC SENSE | 1 |
| 2 | GND | 2 |
| 3 | SUPPLY ON/OFF | 3 |
| 4 | +9V | 4 |
| 5 | +18V | 5 |
| 6 | -18V | 6 |

| P2 | | P1 |
|----|--------------------------------------|----|
| 1 | +BATT | 1 |
| 2 | -BATT | 2 |
| 3 | P-220V AC MAINS TRANSFORMATOR 28V AC | 3 |
| 4 | N-220V AC MAINS TRANSFORMATOR 28V AC | 4 |

27469

CONTENTS

| | |
|---|------------|
| 6 | PARTS LIST |
|---|------------|

6 PARTS LIST

| N2165 | | ECI A/S | N2165 | 802165 |
|----------|---------------|------------|---------------------|----------|
| POSITION | DESCRIPTION | MANUFACTOR | TYPE | PART NO. |
| VARIOUS | CABINET N2165 | GREEN | 226454 ALUMINIUM | 22645400 |

| BASE UNIT N2165 | | ECI A/S | | 702165 | |
|-----------------|---------------------------|--------------------------|--------------|-------------------------|---------|
| POSITION | DESCRIPTION | MANUFACTOR | TYPE | PART NO. | |
| VARIOUS | CAPACITOR MKT | 100nF 10% 630V | ERO | MKT1822 | 11.163 |
| VARIOUS | INSULATION WASCHER | SILICONE FOIL 18x12x0.18 | * EFM | TO-220 18x12x0.18mm | 30.541 |
| VARIOUS | MOUNTING CLIP | TO-220 ENVELOPE | PHILIPS | 56363 | 30.600 |
| VARIOUS | CABLE 1 N2165 | N2165 | ECI A/S | 3-0-27065 | 527065 |
| VARIOUS | LASHING KIT FOR T2130 | AND N2160 / N2161 | ECI A/S | 0-0-26141 | 726141 |
| VARIOUS | SPARE FUSES F.N2165/HFSSB | N2165 | | 0-0-27245 | 727245 |
| VARIOUS | MANUAL N2165 ENGLISH | | ECI A/S | | M2165GB |
| -1 | CONNECTION BOARD | MODULE 1 N2165 | ECI A/S | 5-0-26451F | 626451 |
| -9 | POWER SUPPLY MODULE 9 | N2165 | ECI A/S | 5-0-26409G / 4-0-26409E | 626409 |
| TR1 | TRANSFORMER MAINS | 100VA N2165/T2131 | TRADANIA A/S | 6-0-26933A | 22.513 |

Art.Nr. TD6977.1

| SPARE FUSES F.N2165/HFSSB | | N2165 | ECI A/S | 0-0-27245 | 727245 |
|---------------------------|-------------|-------------------|---------|-------------|----------|
| POSITION | DESCRIPTION | MANUFACTOR | TYPE | | PART NO. |
| VARIOUS | FUSE | 2AT 250V 5x20mm | ELU | 179 120 2AT | 45.508 |
| VARIOUS | FUSE | 5x20mm 6A3 T 250V | * ELU | 17912006300 | 45.510 |

| CONNECTION BOARD | | MODULE 1 N2165 | ECI A/S | 5-0-26451G/4-0-26451E | 626451 |
|------------------|------------------------|-----------------------|-----------|-----------------------|----------|
| POSITION | DESCRIPTION | MANUFACTOR | TYPE | | PART NO. |
| VARIOUS | FUSE HOLDER | 1 POLE 5x20mm PCB V. | ELU | 199015 | 78.398 |
| VARIOUS | FUSE HOLDER | FOR PCB | SHURTER | OG 751 0042 | 78.421 |
| C1-1 | CAPACITOR MKT | 1u0F 10% 100VDC | PHILIPS | 2222 373 21105 | 11.079 |
| C2-1 | CAPACITOR ELECTROLYTIC | 470uF -20/+50% 40VDC | ELNA | RJ3-50-471-M-F | 14.649 |
| C3-1 | CAPACITOR MKT | 1u0F 10% 100VDC | PHILIPS | 2222 373 21105 | 11.079 |
| C4-1 | CAPACITOR CERAMIC | 4.7N 5KV CL2 | FERROPERM | 9'0138,9 "D" | 16.153 |
| C5-1 | CAPACITOR CERAMIC | 4.7N 5KV CL2 | FERROPERM | 9'0138,9 "D" | 16.153 |
| D1-1 | DIODE | 1N4148 HIGH SPEED | PHILIPS | 1N4148-143 | 25.131 |
| D2-1 | DIODE | MR750 | MOTOROLA | MR750 | 25.219 |
| F1-1 | FUSE | 5x20mm 6A3 T 250V | * ELU | 17912006300 | 45.510 |
| F2-1 | FUSE | 5x20mm 6A3 T 250V | * ELU | 17912006300 | 45.510 |
| F3-1 | FUSE | 2AT 250V 5x20mm | WICKMANN | 19 195 2AT | 45.508 |
| P1-1 | MULTIPLUG | 2x3 POLES PCB VERSION | MOLEX | 39-28-1063 | 78.217 |
| P2-1 | PLUG 4 POLES | | MOLEX | 39-28-1043 | 78.216 |
| R1-1 | RESISTOR MF | 220 OHM 5% 0.33W | PHILIPS | 2322 187 73221 | 02.456 |

6 PARTS LIST

N2165

| POSITION | DESCRIPTION | | MANUFACTOR | TYPE | PART NO. |
|----------|----------------|-----------------|--------------|-------------------------|----------|
| RE1-1 | RELAY | 12VDC 1SH. 2A. | ORIG. ELECTR | OUC-SS-112D (-S/-SH-) | 21.300 |
| ST1-1 | TERMINAL BLOCK | 10 POLES 1.5mm2 | PTR | AK300/10b m.MESS.SKRUER | 81.017 |
| ST2-1 | TERMINAL BLOCK | 8 POLES 1.5mm2 | PTR | AK300/8b m.MESS.SKRUER | 81.015 |
| ST3-1 | TERMINAL BLOCK | 14 POLES 1.5mm2 | PTR | AK300/14b m.MESS.SKRUER | 81.029 |
| ST4-1 | TERMINAL BLOCK | 10 POLES 1.5mm2 | PTR | AK300/10b m.MESS.SKRUER | 81.017 |
| ST5-1 | TERMINAL BLOCK | 4 POLES 1.5mm2 | PTR | AK300/4b m.MESS.SKRUER | 81.025 |
| ST6-1 | TERMINAL BLOCK | 4 POLES 2.5mm2 | PTR | AK110/4DS m.MESS.SKRUER | 81.038 |
| ST7-1 | TERMINAL BLOCK | 3 POLES 2.5mm2 | PTR | AK110/3DS m.MESS.SKRUER | 81.037 |

| POWER SUPPLY MODULE 9 | N2165 | ECI A/S | 5-0-26409F/4-0-26409F | 626409 |
|-----------------------|-------|---------|-----------------------|--------|
|-----------------------|-------|---------|-----------------------|--------|

| POSITION | DESCRIPTION | | MANUFACTOR | TYPE | PART NO. |
|----------|------------------------|--------------------------|------------|--|----------|
| C1-9 | CAPACITOR ELECTROLYTIC | 22uF 20% 35VDC | ELNA | RJ2-35-V-220-M-F1 | 14.516 |
| C2-9 | CAPACITOR MKT | 1uF 10% 63VDC | PHILIPS | 2222 370 78105 | 11.137 |
| C3-9 | CAPACITOR ELECTROLYTIC | 2200uF -20+50% 63VDC | PHILIPS | 2222 021 48222 | 14.733 |
| C4-9 | CAPACITOR ELECTROLYTIC | 2200uF -20+50% 63VDC | PHILIPS | 2222 021 48222 | 14.733 |
| C5-9 | CAPACITOR MKT | 100nF 5% 63VDC | PHILIPS | 2222 370 79104 | 11.135 |
| C6-9 | CAPACITOR ELECTROLYTIC | 100uF 20% 10VDC | ELNA | RJ3-10-V-101-M-T34 | 14.607 |
| C7-9 | CAPACITOR MKT | 10nF 20% 100VDC | PHILIPS | 2222 370 38103 | 11.168 |
| C8-9 | CAPACITOR MKT | 220nF 10% 63VDC | PHILIPS | 2222 370 78224 | 11.095 |
| C9-9 | CAPACITOR MKT | 100nF 5% 63VDC | PHILIPS | 2222 370 79104 | 11.135 |
| C10-9 | CAPACITOR MKT | 10nF 20% 100VDC | PHILIPS | 2222 370 38103 | 11.168 |
| C11-9 | CAPACITOR MKT | 10nF 20% 100VDC | PHILIPS | 2222 370 38103 | 11.168 |
| C12-9 | CAPACITOR MKT | 1uF 10% 63VDC | PHILIPS | 2222 370 78105 | 11.137 |
| C13-9 | CAPACITOR MKT | 1uF 10% 63VDC | PHILIPS | 2222 370 78105 | 11.137 |
| C14-9 | CAPACITOR ELECTROLYTIC | 22uF 20% 35VDC | ELNA | RJ2-35-V-220-M-F1 | 14.516 |
| C15-9 | CAPACITOR POLYSTYRENE | 470pF 1% 630VDC | PHILIPS | 2222 431 84701 | 10.429 |
| C16-9 | CAPACITOR CERAMIC | 220pF 10% 500VDC CL2 | NKE | DT35-0465 758S B 221K500V FLAT PACK | 16.090 |
| C17-9 | CAPACITOR CERAMIC | 1nOF 10% CL2 500VDC | NKE | DT 360 758L B 102 K 500V FLAT PACK | 15.160 |
| C18-9 | CAPACITOR CERAMIC | 220pF 10% 500VDC CL2 | NKE | DT35-0465 758S B 221K500V FLAT PACK | 16.090 |
| C19-9 | CAPACITOR MKT | 150nF 5% 50VDC | ERO | MKT 1826-415/06 4-G | 11.181 |
| C20-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C21-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C22-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C23-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C24-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C25-9 | CAPACITOR ELECTROLYTIC | 100uF -10+50% 25VDC | ERO | EKM 00 CC 310 E G5 | 14.610 |
| C26-9 | CAPACITOR MKT | 100nF 10% 100VDC | PHILIPS | 2222 371 28104 | 11.180 |
| C27-9 | CAPACITOR MKT | 100nF 10% 100VDC | PHILIPS | 2222 371 28104 | 11.180 |
| C28-9 | CAPACITOR MKT | 100nF 10% 100VDC | PHILIPS | 2222 371 28104 | 11.180 |
| D1-9 | DIODE ZENER | 18V 5% 0.4W BZX79C18 | PHILIPS | BZX79C18 | 26.564 |
| D2-9 | DIODE RECTIFIER | 1N5402 200V/3A | PROMAX | 1N5402 | 25.116 |
| D3-9 | DIODE RECTIFIER | 1N5402 200V/3A | PROMAX | 1N5402 | 25.116 |
| D4-9 | DIODE RECTIFIER | 1N5402 200V/3A | PROMAX | 1N5402 | 25.116 |
| D5-9 | DIODE RECTIFIER | 1N5402 200V/3A | PROMAX | 1N5402 | 25.116 |
| D6-9 | DIODE POWER | SCHOTTKY 45VDC/1A | PHILIPS | PBYR 1045 | 27.617 |
| D7-9 | ZENER DIODE 12V 5% | 1.3W BZV85C12/BZX85C12 | PHILIPS | BZV85C12 | 26.638 |
| D8-9 | DIODE FAST RECOVERY | 600VDC/1A | PHILIPS | BYD 33 J | 27.150 |
| D9-9 | DIODE FAST RECOVERY | 600VDC/1A | PHILIPS | BYD 33 J | 27.150 |
| D10-9 | DIODE FAST RECOVERY | 600VDC/1A | PHILIPS | BYD 33 J | 27.150 |
| D11-9 | DIODE FAST RECOVERY | 600VDC/1A | PHILIPS | BYD 33 J | 27.150 |
| D12-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 | THOMSON | BYT 03-400 TAPED | 25.212 |
| D13-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 | THOMSON | BYT 03-400 TAPED | 25.212 |

6 PARTS LIST

N2165

| POSITION | DESCRIPTION | MANUFACTOR | TYPE | PART NO. |
|----------|---------------------------|----------------------------------|-------------|--------------------------------|
| D14-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 THOMSON | BYT 03-400 | TAPED 25.212 |
| D15-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 THOMSON | BYT 03-400 | TAPED 25.212 |
| D16-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 THOMSON | BYT 03-400 | TAPED 25.212 |
| D17-9 | DIODE FAST RECOVERY | 400V/3A BYT03-400/MUR440 THOMSON | BYT 03-400 | TAPED 25.212 |
| D18-9 | DIODE SHUNT REGULATOR | PROGRAMMABLE TL431C MOTOROLA | TL431CP | 26.997 |
| D19-9 | DIODE HIGH SPEED | 1N4448 | PHILIPS | 1N4448 25.147 |
| L1-9 | CHOKE | TL531 | TRANS-ELEC. | 6-0-26309A 400531 |
| L2-9 | CHOKE FIXED | 10mH/100mADC | TRADANIA | 6-0-26623 20.254 |
| | | | | Art.Nr: TD 6994.0 |
| L3-9 | CHOKE FIXED TOROIDAL | 400uH/2A +20/-12% | ULVECO | 2-2.0-406-2-R (DK11752) 20.245 |
| | | | | UDT.I.FLG.Tg:0-0-26192 |
| L4-9 | CHOKE FIXED TOROIDAL | 630uH/1A6 +20/-12.5% | ULVECO | Art.Nr: DK11-542 20.244 |
| | | | | (2-1.6-630-1) |
| L5-9 | CHOKE FIXED TOROIDAL | 630uH/1A6 +20/-12.5% | ULVECO | Art.Nr: DK11-542 20.244 |
| | | | | (2-1.6-630-1) |
| OC1-9 | OPTO COUPLER | CNY17-2 | TOSHIBA | CNY 17-2 32.530 |
| OC2-9 | OPTO COUPLER | CNY17-2 | TOSHIBA | CNY 17-2 32.530 |
| P1-9 | PLUG 4 POLES | | MOLEX | 39-28-1043 78.216 |
| P2-9 | MULTIPLUG | 2x3 POLES PCB VERSION | MOLEX | 39-28-1063 78.217 |
| Q1-9 | TRANSISTOR AF POWER NPN | DARL.BD645/BDX53 | PHILIPS | BD645 29.122 |
| Q2-9 | TRANSISTOR AF | BC547B NPN TO-92 | PHILIPS | BC547B 28.067 |
| Q3-9 | TRANS.POW.MOSFET N-CHANN. | 100V/27A/85mOHM IRF540 | MOTOROLA | IRF540 29.402 |
| Q4-9 | TRANS.POW.MOSFET N-CHANN. | 100V/27A/85mOHM IRF540 | MOTOROLA | IRF540 29.402 |
| R1-9 | RESISTOR MF | 820 OHM 5% 0.33W | PHILIPS | 2322 180 73821 02.470 |
| R2-9 | RESISTOR MF | 4k7 OHM 5% 0.33W | PHILIPS | 2322 180 73472 02.488 |
| R3-9 | RESISTOR MF | 10k0 OHM 1% 0.6W | * PHILIPS | 2322 156 11003 03.427 |
| R4-9 | RESISTOR MF | 13k3 OHM 1% 0.6W | PHILIPS | 2322 156 11333 03.473 |
| R5-9 | RESISTOR MF | 2k2 OHM 5% 0.33W | PHILIPS | 2322 180 73222 02.480 |
| R6-9 | RESISTOR MF | 270 OHM 5% 0.33W | PHILIPS | 2322 180 73271 02.458 |
| R7-9 | RESISTOR MF | 10k OHM 5% 0.33W | PHILIPS | 2322 180 73103 02.496 |
| R8-9 | RESISTOR MF | 10k OHM 5% 0.33W | PHILIPS | 2322 180 73103 02.496 |
| R9-9 | RESISTOR MF | 100k OHM 1% 0.6W | * PHILIPS | 2322 156 11004 03.477 |
| R10-9 | RESISTOR MF | 680 OHM 5% 0.33W | PHILIPS | 2322 180 73681 02.468 |
| R11-9 | PRESET CERMET | 1k0 OHM 10% 0.5W | BOURNS | 3386P-1-102 07.886 |
| R12-9 | RESISTOR MF | 6k8 OHM 5% 0.33W | PHILIPS | 2322 180 73682 02.492 |
| R13-9 | RESISTOR MF | 100 OHM 5% 0.33W | PHILIPS | 2322 180 73101 02.448 |
| R14-9 | RESISTOR MF | 100 OHM 5% 0.33W | PHILIPS | 2322 180 73101 02.448 |
| R15-9 | RESISTOR MF | 100 OHM 5% 0.33W | PHILIPS | 2322 180 73101 02.448 |
| R16-9 | RESISTOR MF | 22k OHM 5% 0.33W | PHILIPS | 2322 180 73223 02.504 |
| R17-9 | RESISTOR WW | R180 OHM 5% 2W | MODULOHM | R18-J-2W-E-1 06.220 |
| R18-9 | RESISTOR WW | R180 OHM 5% 2W | MODULOHM | R18-J-2W-E-1 06.220 |
| R19-9 | RESISTOR MF | 470 OHM 5% 0.33W | PHILIPS | 2322 180 73471 02.464 |
| R20-9 | RESISTOR MF | 22k OHM 5% 0.33W | PHILIPS | 2322 180 73223 02.504 |
| R21-9 | RESISTOR MF | 1k0 OHM 5% 0.33W | PHILIPS | 2322 180 73102 02.472 |
| R22-9 | RESISTOR MF | 2k2 OHM 5% 0.33W | PHILIPS | 2322 180 73222 02.480 |
| R23-9 | RESISTOR MF | 240 OHM 5% 0.33W | PHILIPS | 2322 180 73241 02.457 |
| R24-9 | RESISTOR MF | 1k0 OHM 5% 0.33W | PHILIPS | 2322 180 73102 02.472 |
| R25-9 | RESISTOR MF | 4k7 OHM 5% 0.33W | PHILIPS | 2322 180 73472 02.488 |
| R26-9 | RESISTOR MF | 100k OHM 5% 0.33W | PHILIPS | 2322 180 73104 02.520 |
| R27-9 | RESISTOR MF | 13k3 OHM 1% 0.6W | PHILIPS | 2322 156 11333 03.473 |
| R28-9 | RESISTOR MF | 1k87 OHM 1% 0.6W | PHILIPS | 2322 156 11872 03.474 |
| R29-9 | RESISTOR PMF | 120 OHM 5% 2W | PHILIPS | 2322 191 31201 04.178 |
| R30-9 | RESISTOR PMF | 390 OHM 5% 2W | PHILIPS | 2322 194 13391 04.189 |
| R31-9 | RESISTOR PMF | 390 OHM 5% 2W | PHILIPS | 2322 194 13391 04.189 |
| RE1-9 | RELAY | 24VDC 1MAKE 16A. | PASI | KH/A-3-C 21.027 |
| RE2-9 | RELAY | 24VDC 1MAKE 16A. | PASI | KH/A-3-C 21.027 |
| TR1-9 | TRANSFORMER SMPS | 35x40x43mm | K&J ELEK. | 6-0-26620A 22.173 |
| | | | | Art.Nr: ETD34-0003 |
| U1-9 | CURRENT MODE PWM CONTROL. | UC3846 | UNITRODE | UC3846 31.486 |