Write and Submit your first Linux Kernel Patch

Greg Kroah-Hartman gregkh@linuxfoundation.org

github.com/gregkh/kernel-tutorial.git

Documentation/HOWTO

Documentation/ development_process

Working with linux-next

```
$ git remote add linux-next \
    git://git.kernel.org/pub/scm/linux/kernel/git/next/linux-next.git
$ git fetch linux-next
$ git fetch --tags linux-next
... # later on
```

\$ git remote update

Linux Kernel Coding Style

Why Care?

"It is not merely a matter of aesthetics that programs should be written in a particular style. Rather there is a psychological basis for writing programs in a conventional manner: programmers have strong expectations that other programmers will follow these discourse rules. If the rules are violated, then the utility afforded by the expectations that programmers have built up over time is effectively nullified."

- Soloway & Ehrlich

Documentation/CodingStyle

scripts/checkpatch.pl

```
USB: otg: Fix bug on remove path without transceiver
In the case where a gadget driver is removed while no
transceiver was found at probe time, a bug in
otg_put_transceiver() will trigger.
Signed-off-by: Robert Jarzmik <robert.jarzmik@free.fr>
Signed-off-by: Greg Kroah-Hartman <gregkh@suse.de>
--- a/drivers/usb/otg/otg.c
+++ b/drivers/usb/otg/otg.c
@@ -43,7 +43,8 @@ EXPORT_SYMBOL(otg_get_transceiver);
void otg_put_transceiver(struct otg_transceiver *x)
       put_device(x->dev);
       if(x)
              put_device(x->dev);
```

Developer's Certificate of Origin

- (a) I created this change; or
- (b) Based this on a previous work with a compatible license; or
- (c) Provided to me by (a), (b), or (c) and not modified

(d) This contribution is public.

git diff

git commit

git show

git format-patch

git send-email

scripts/get_maintainer.pl

Checklist

- Kernel builds with patch applied
- Correct "From:" address
- Concise "Subject:"
- Explain the patch
- Signed-off-by

kernelnewbies.org





Write and Submit your first Linux Kernel Patch

Greg Kroah-Hartman gregkh@linuxfoundation.org

github.com/gregkh/kernel-tutorial.git

Documentation/HOWTO

Documentation/ development_process

Working with linux-next


```
$ git remote add linux-next \
    git://git.kernel.org/pub/scm/linux/kernel/git/next/linux-next.git
$ git fetch linux-next
$ git fetch --tags linux-next
... # later on
$ git remote update
```

Linux Kernel Coding Style

Why Care?

"It is not merely a matter of aesthetics that programs should be written in a particular style. Rather there is a psychological basis for writing programs in a conventional manner: programmers have strong expectations that other programmers will follow these discourse rules. If the rules are violated, then the utility afforded by the expectations that programmers have built up over time is effectively nullified."

- Soloway & Ehrlich

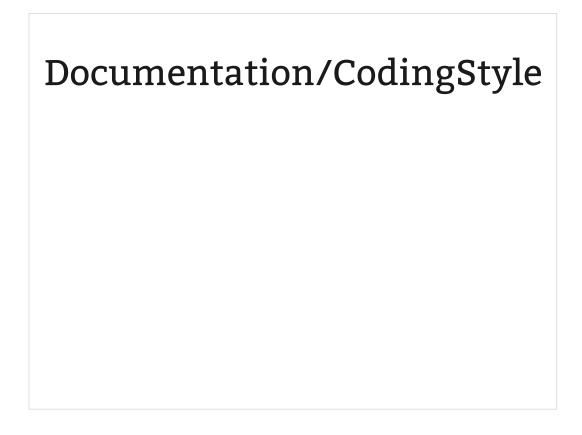



```
USB: otg: Fix bug on remove path without transceiver
In the case where a gadget driver is removed while no
transceiver was found at probe time, a bug in
otg_put_transceiver() will trigger.
Signed-off-by: Robert Jarzmik <robert.jarzmik@free.fr>
Acked-by: David Brownell <dbrownell@users.sourceforge.net>
Signed-off-by: Greg Kroah-Hartman <gregkh@suse.de>
--- a/drivers/usb/otg/otg.c
+++ b/drivers/usb/otg/otg.c
@@ -43,7 +43,8 @@ EXPORT_SYMBOL(otg_get_transceiver);
void otg_put_transceiver(struct otg_transceiver *x)
{
       put_device(x->dev);
        if (x)
                put_device(x->dev);
}
```

Developer's Certificate of Origin

- (a) I created this change; or
- (b) Based this on a previous work with a compatible license; or
- (c) Provided to me by (a), (b), or (c) and not modified
- (d) This contribution is public.


git diff

git commit

git show

git format-patch

git send-email

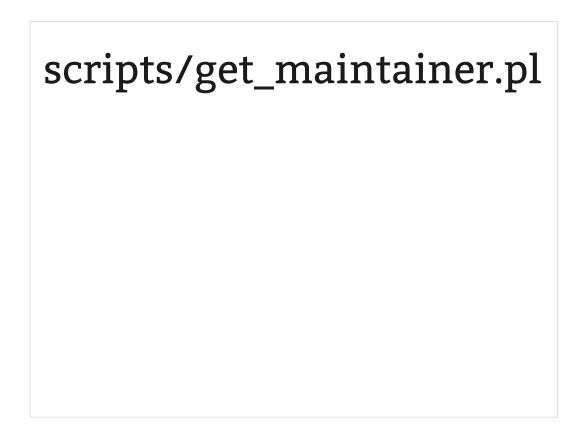

Checklist

- Kernel builds with patch applied
- Correct "From:" address
- Concise "Subject:"
- Explain the patch
- Signed-off-by

kernelnewbies.org



