



KB2LJJ

[Home](#)

Radio Mods Database and Manuals

### Modifications for the Yaesu FT-7800


#### MARS CAP modification for FT-7800R

Before MARS CAP modification:

TX: 144 - 148, 430 - 450 MHz

#### Modification for the FT-7800R

#### MODIFICATION PROCEDURE:

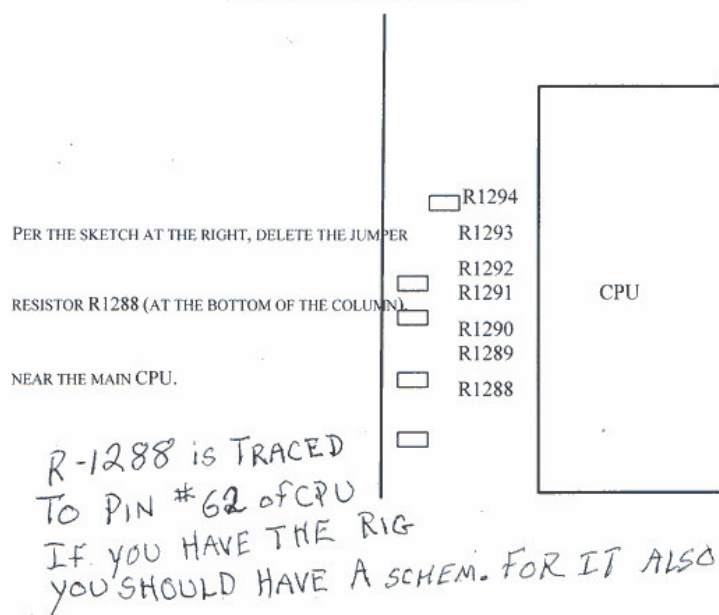

#### Yaesu FT-7800 TX mod

With all control knobs facing towards you, Remove top cover.

**Notice** Front Left corner is the processor with a crystal mounted on top.

Extreme left of the radio you will see a row of pads, All empty except for a diode to the front and one to the back, Notice 7 or 8 spots for diodes, But only 2 installed.

REMOVE the FRONT diode closest to the head of the radio with a small soldering iron or tool.

Turn the radio back on it will automatically reset.. See photo.



### Yaesu FT-7800 TX mod TX mod in German language with picture

Yaesu FT 7800 TX – Erweiterung Wie auf den Bildern dargestellt entfernen.

Nach dem Auslöten Gerät schließen und Reset durchführen.

Reset:

MHz – Taste halten und Gerät einschalten.

Band Set

Das wars !

Alle Angaben ohne Gewähr! Übernehme keine Haftung wenn es schief geht !

Modifikation auf eigene Gefahr !

ACHTUNG : GARANTIEVERLUST !

TX: 137 – 174 / 420 – 470 MHz

